


# Ambient Air Tubesheets

## Models T-46 through T-99118

Designed to be used as a filter section in existing or built-up air handling and HVAC systems.

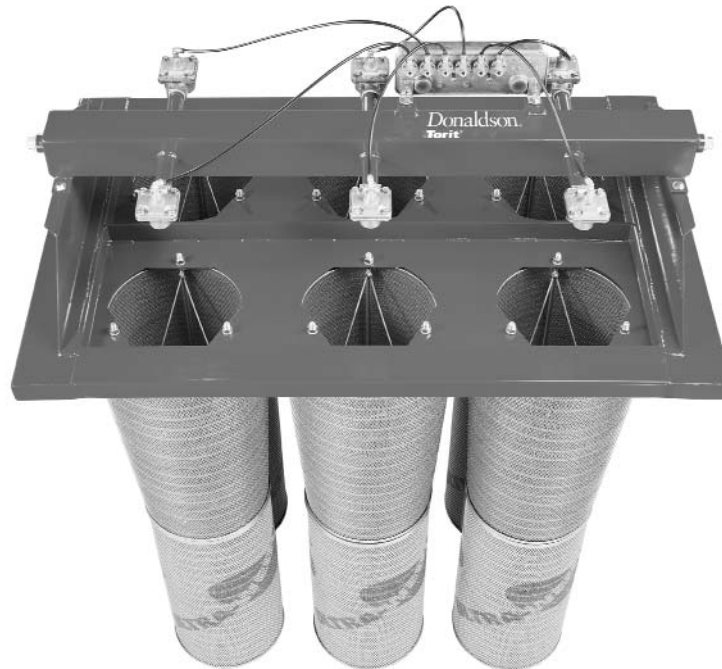

T-69

### Flexible

- Unique filtration design is especially useful in applications that require customized packaging of the filters to meet requirements for airflow, physical size, or integration with other equipment.
- Excellent alternative in industrial environments where dust loading is too high for standard panel-type filters.

### Powerful

- Ultra-Web® filter cartridges featuring nanofiber technology provide highest filtration efficiency and longest filter life.

- High collection efficiency of 99.999% on 0.5 µm dust particles allows recirculation of heated or air-conditioned plant air.\*
- Automatic pulse-cleaning design for continuous operation.


### Cost Effective

- Low system pressure drop keeps operating costs down.
- Easy filter changeout for quicker maintenance.

# Ambient Air Tubesheet

## Operational Explanation

During normal operation, air flows inward through the intake duct and passes through the filter elements. Dust is collected on the outside surfaces of the elements. Clean air flows through the center of the elements into the clean air plenum.

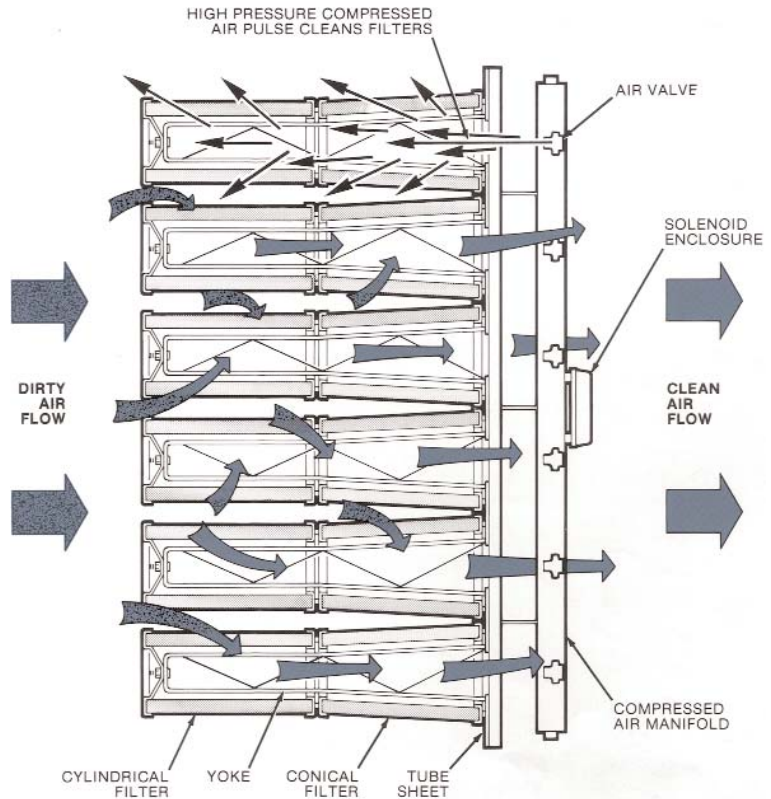

## Dimensions & Specifications

Model	Clean Airflow (cfm)	No. of Filters Ultra-Web®	Filter Area (ft²)	Filter Arrangement		No. of Valves	Dimensions (in)**			Shipping Weight (lbs)
				Columns	Rows		W	H	L	
T-46	4,950-6,660	8	2,104	2	2	4	40.0	36.5	69.9	370
T-69	6,600-9,900	12	3,156	3	2	6	56.5	36.5	69.9	520
T-913	9,900-13,200	16	4,208	4	2	8	73.0	36.5	69.9	670
T-1216	11,000-16,500	20	5,260	5	2	10	89.5	36.5	70.1	825
T-1319	13,200-19,800	24	6,312	4	3	12	73.0	53.0	68.3	960
T-1929	19,800-29,700	36	9,468	6	3	18	106.0	53.0	68.3	1,415
T-2939	29,700-39,600	48	12,624	4	6	24	73.0	102.5	68.3	1,800
T-3959	39,600-59,400	72	18,936	6	6	36	106.0	102.5	68.3	2,660
T-5979	59,400-79,200	96	25,248	8	6	48	139.0	102.5	68.3	3,500
T-7999	79,200-99,000	120	31,560	10	6	60	172.0	102.5	68.3	4,360
T-99118	99,000-118,800	144	37,872	12	6	72	223.0	102.5	68.3	5,210

\* Fractional efficiency is the ratio of the number of particles captured by the filters compared to the number entering the dust collector. The fractional efficiency of Ultra-Web cartridges has been documented by an independent lab under the following conditions: Downflo® collector running at a 2:1 air-to-media ratio and pulsed continuously; dust injected at one grain per cfm; efficiency measured optically after 350 hours. Actual efficiency of the cartridge may vary depending on the application. Dust concentration, particle size, airflow, and pulse-cleaning methods all affect filtration efficiency.

\*\* Exact dimensions to be confirmed after receipt of order.

REPRESENTANTE EN ARGENTINA



Donaldson Company, Inc.  
Industrial Air Filtration  
P.O. Box 1299  
Minneapolis, MN 55440  
Tel 800-365-1331  
dustmktg@mail.donaldson.com  
www.donaldson.com



Oficina: Av. San Pedrito 491 - 1º Piso - C1406EXE - Bs. As. Argentina  
Tel. (54-11) 4612-0151 (líneas rotativas) - Fax (54-11) 4637-0721  
E-mail: ventas@clafil.com.ar